

XSCACE



www.xscace.com

support@xscace.com

Gain (Maximum)

Input Gain: -15dB

Output Gain: 8.5dB

XOver Or Crossover

HPF: 250, Type: 48dB-Bworth

LPF: 20000, Type: 12db-Bworth

EQ Filter

1. Freq: 472Hz, Gain: -17, Q-Value: 4.072, Type: PEQ

*Bypass to be UNCHECKED

CANE

DSP Settings

XSCACE



www.xscace.com



support@xscace.com

CANE

Recommended Setups

XSCACE




www.xscace.com



support@xscace.com

EQ (Using the 4stream app).

500Hz: -8dB

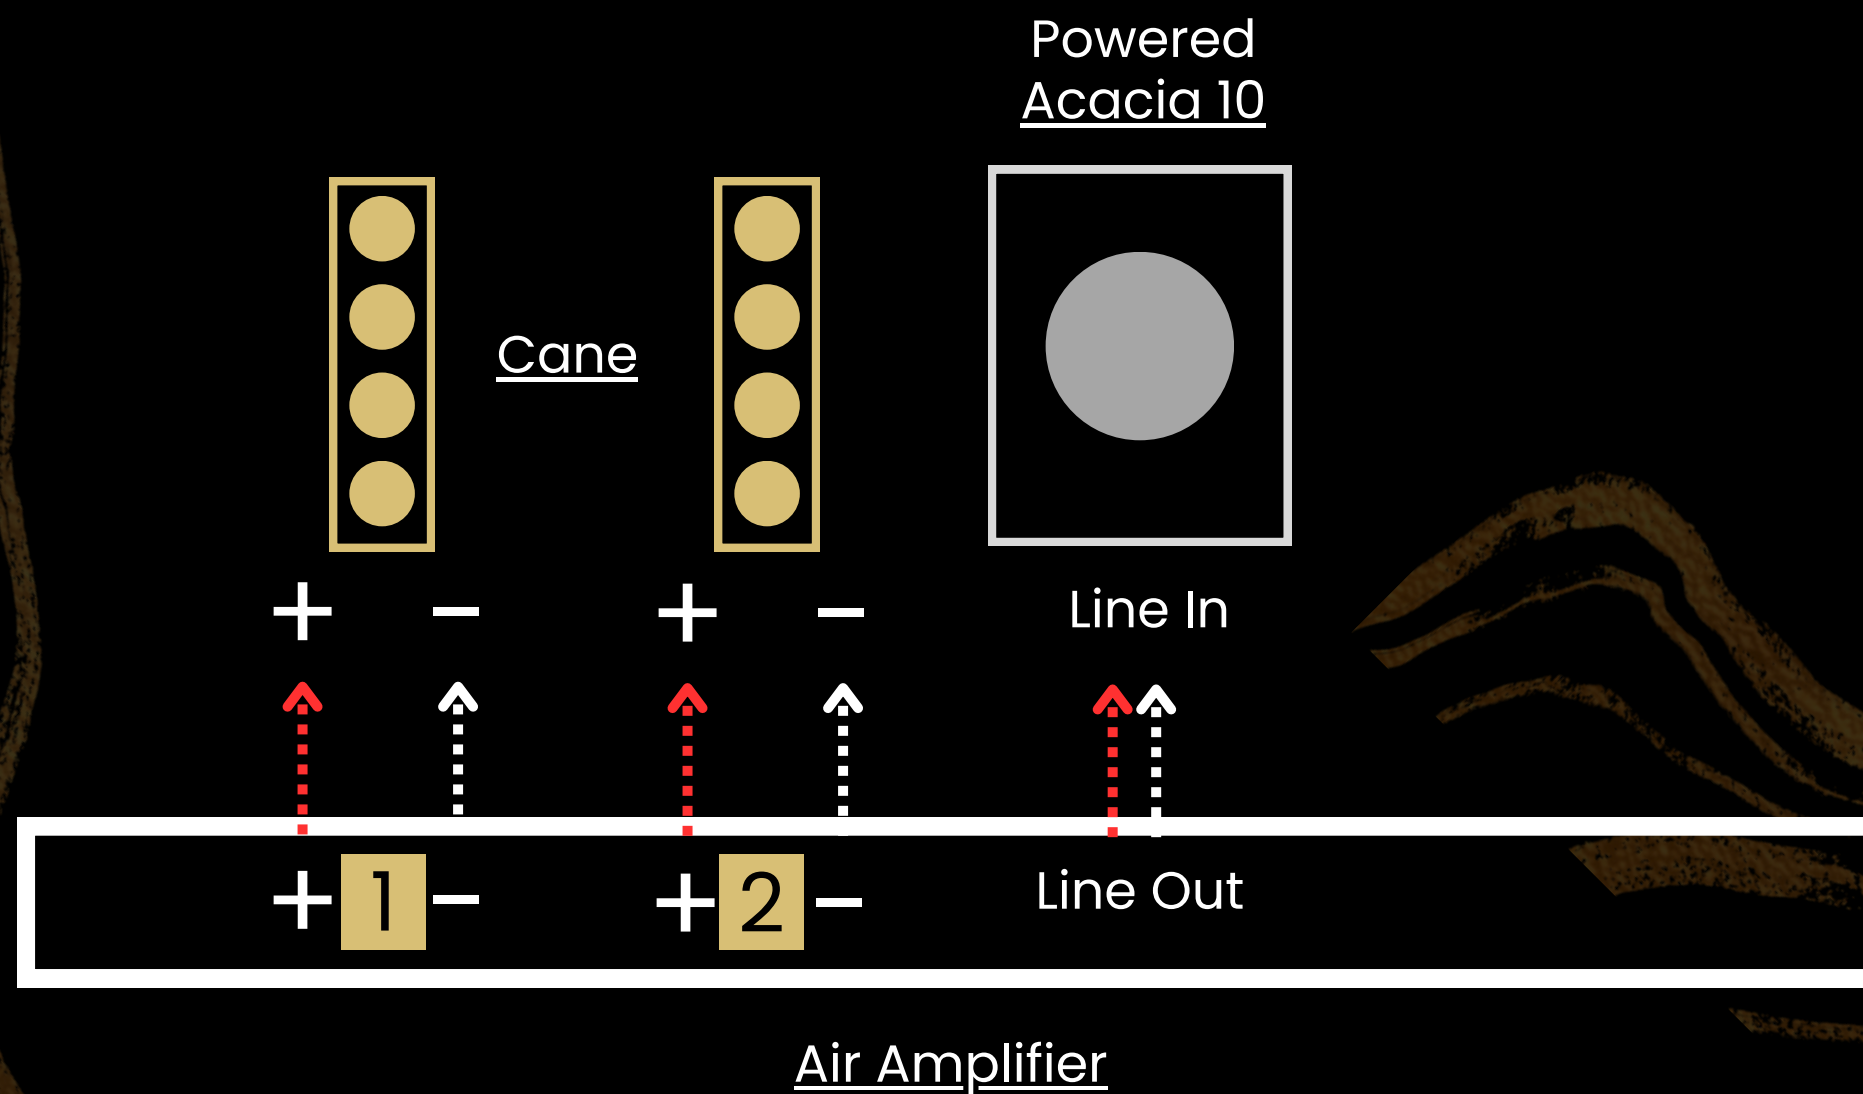

Setup ONE

- 2x Canes
- 1x Air Amplifier
- 1x Acacia 10 Powered

XSCACE

EQ (Using the 4stream app).


500Hz: -8dB



www.xscace.com



support@xscace.com

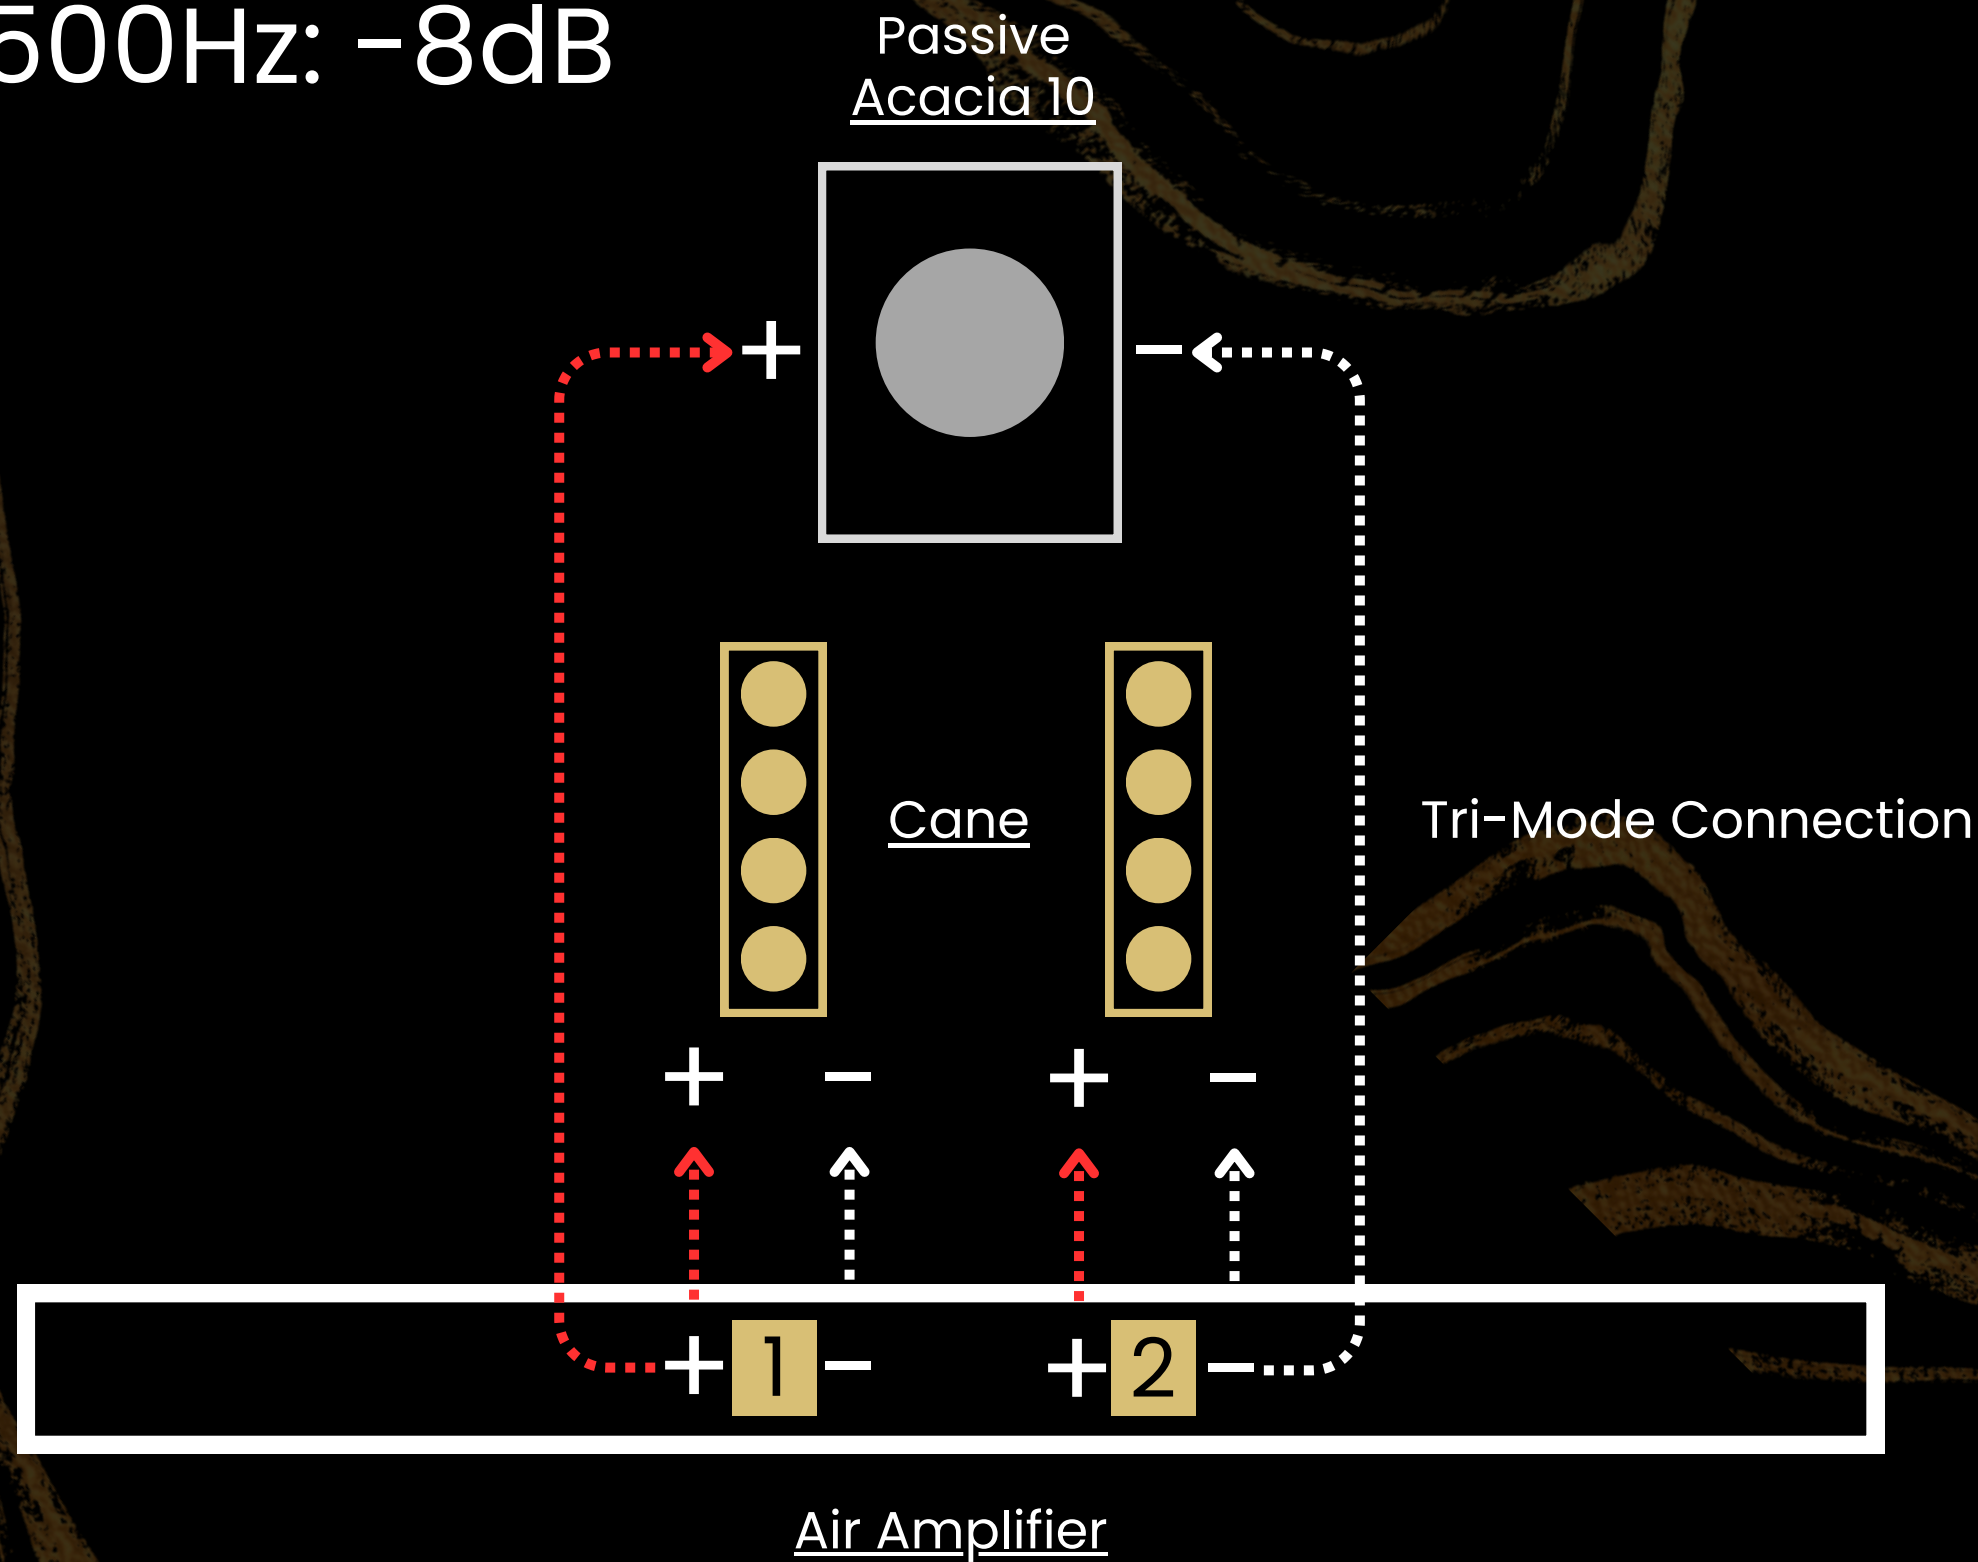

Setup TWO


- 2x Canes
- 1x Air Amplifier
- 1x Acacia 10 Passive

Setup THREE

4x Canes

1x Passive Acacia 10

1x Root 4 DSP Amplifier

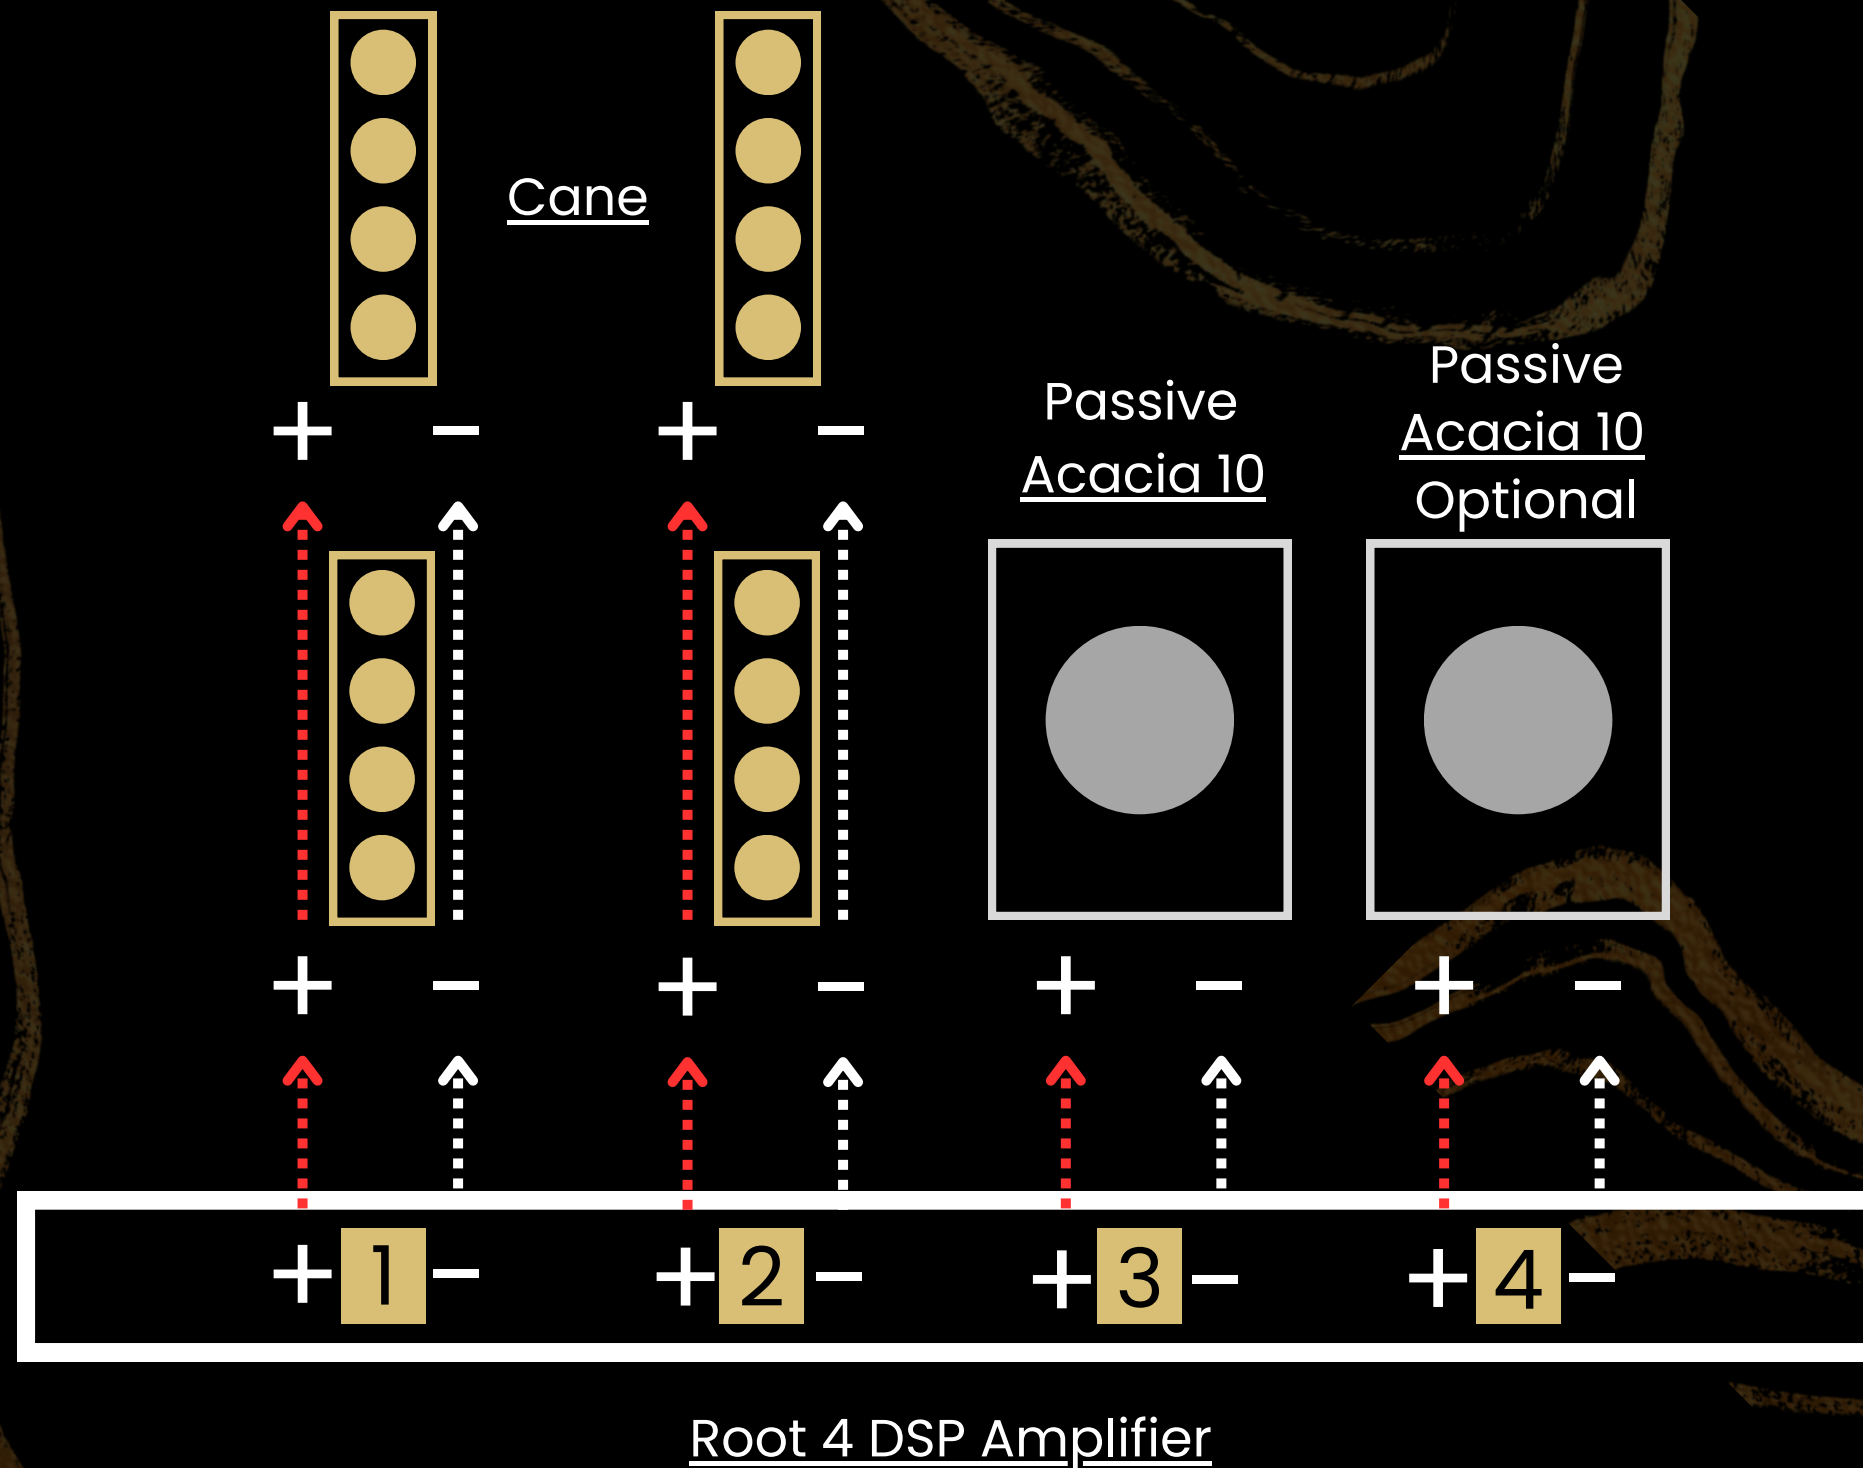

DSP Settings File

[Download](#)






Setup FOUR

4x Canes

1x Passive Acacia 10

1x Root 4 DSP Amplifier

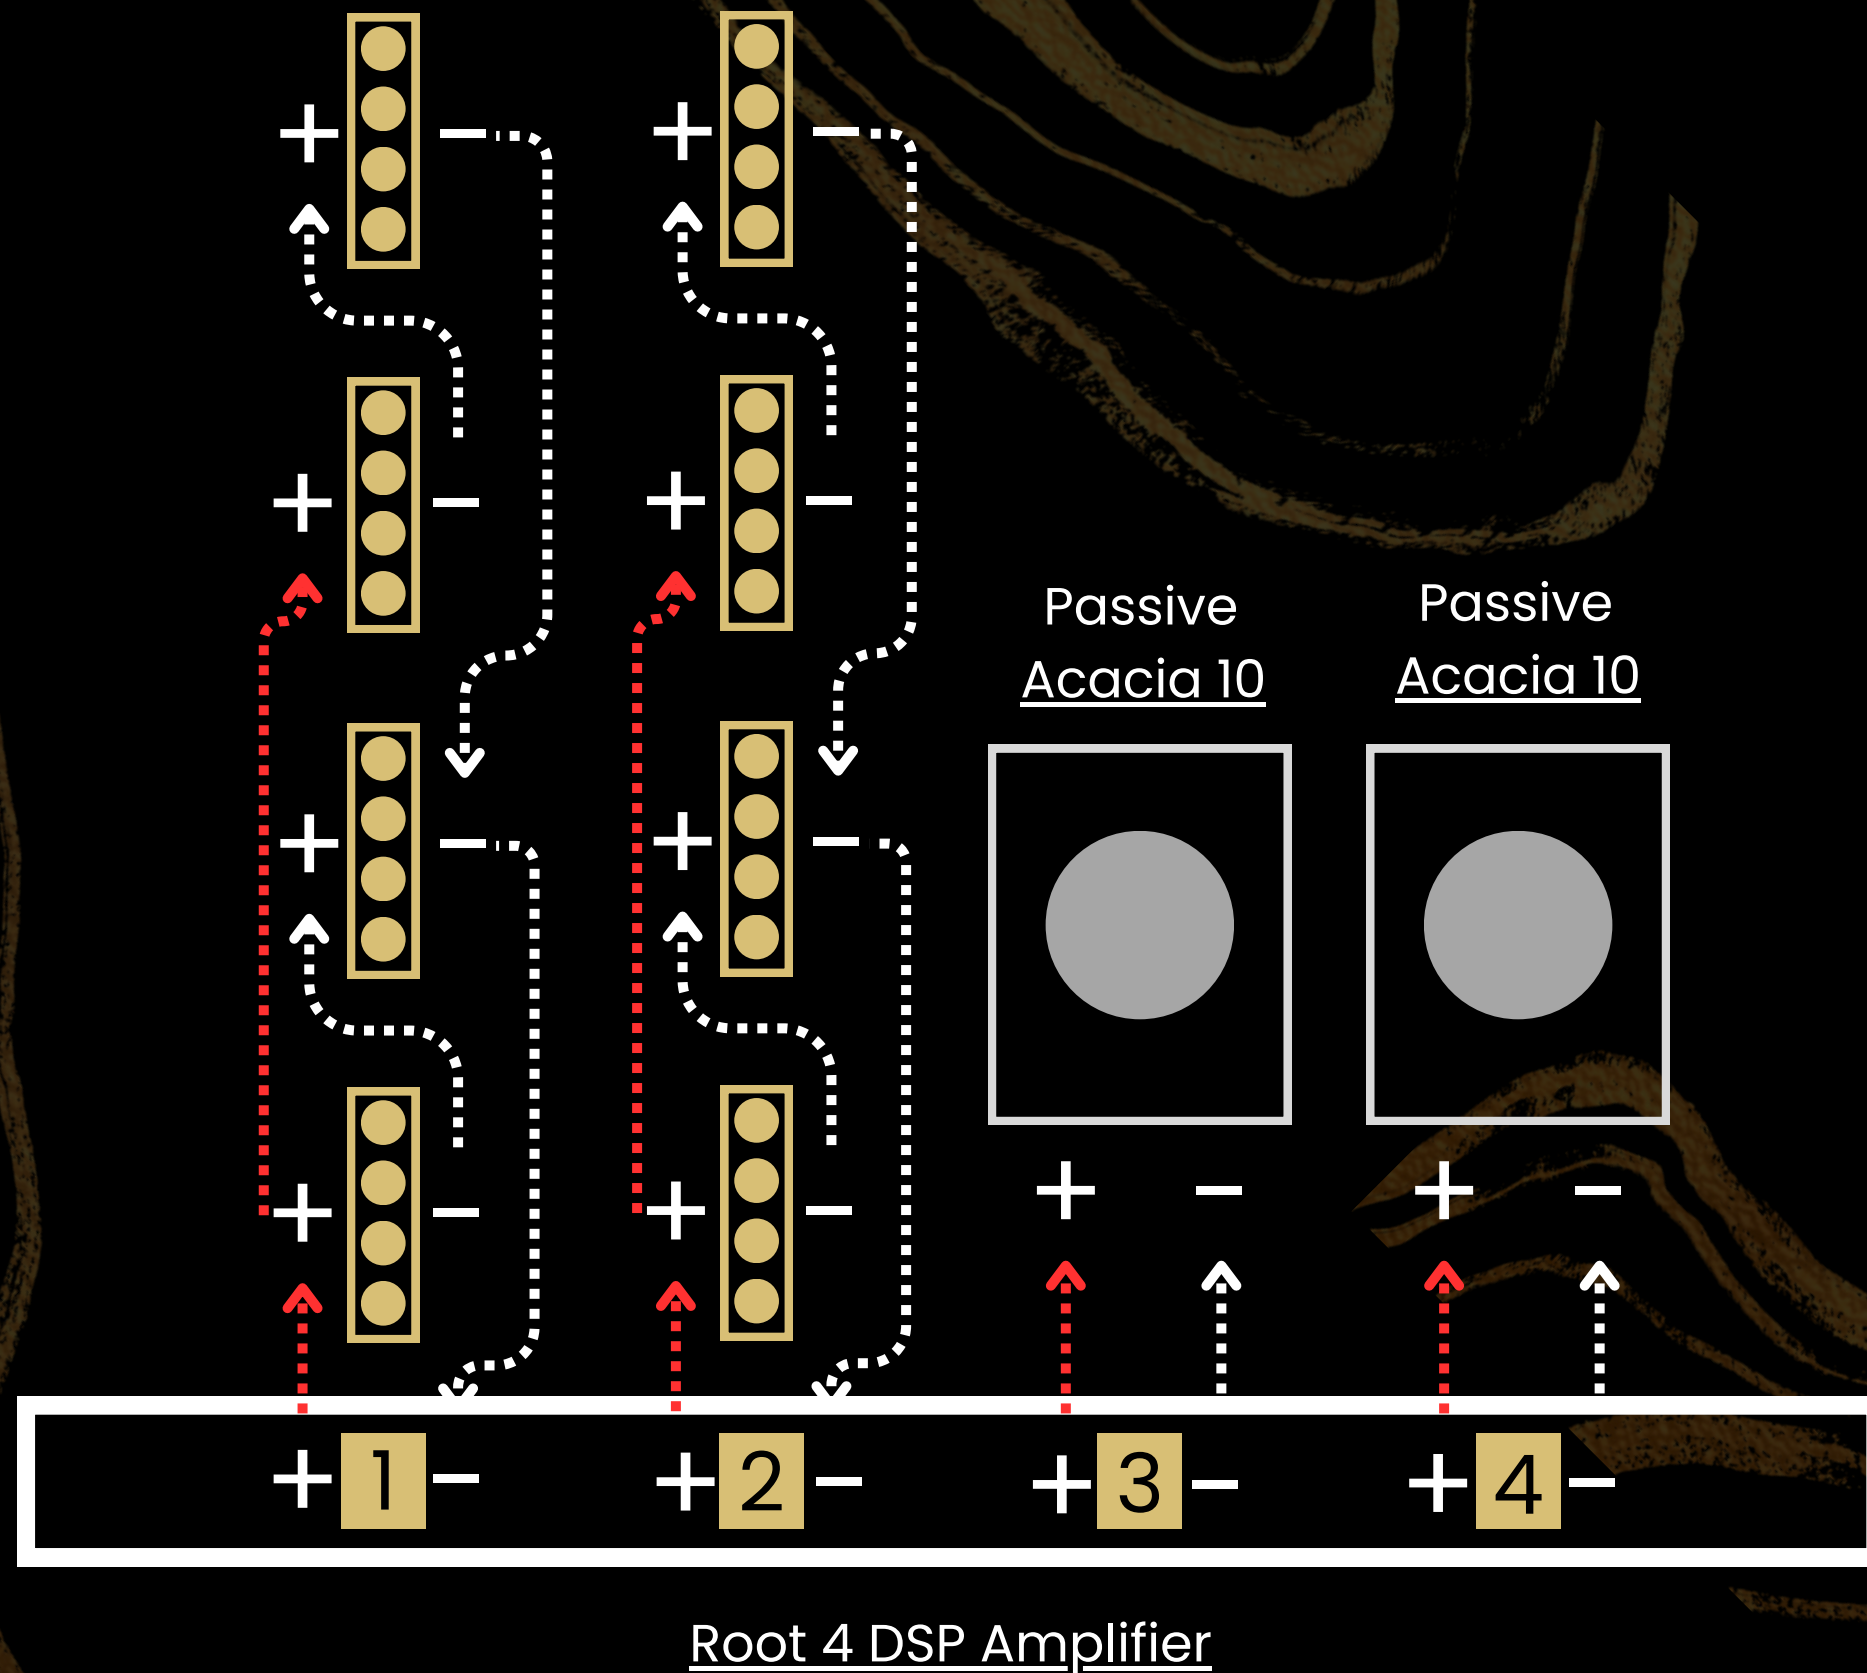

DSP Settings File

[Download](#)

